



# Blackberry 8700c Display Screen Replacement

Written By: k3nt



## INTRODUCTION

In this installation guide, you will remove a damaged display screen and install a new one in your Blackberry 8700c. The pictures above each step correspond to that step. If you hover your mouse over a picture, a larger picture will appear on the left. Each step's corresponding pictures are referred to as Pictures 1, 2, or 3. Picture 1 is the far-left picture, Picture 2 is the middle picture, and Picture 3 is the far-right picture.



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Display Screen



- The required tools are pictured on the left (Picture 1). The tools are, left to right, spudger, T6 screwdriver, plastic opening tool.
- Remove the back cover by pushing the button near the bottom of the phone (Picture 2) and sliding the cover off (Picture 3).

## Step 2



- Using your fingernail, remove the battery by pulling on the notch on the top-right of the battery.



## Step 3





- Remove the inner back cover by unscrewing all three T6 screws (circled in Picture 1) with a T6 Torx screwdriver.
- ⓘ The inner back cover, removed in the next bullet, can be difficult to remove. You may need to use a plastic opening tool. Insert the plastic tool near the top of the phone between the cover and the phone. Gently pry the cover off.
- Pull the inner back cover from the bottom towards you and up (Picture 2).

## Step 4



- Remove the inner cover by unscrewing all four T6 screws with a T6 Torx screwdriver (circled in Picture 1).
- ⓘ A small black piece (circled in Picture 2 and displayed in Picture 3) will fall out when you remove the cover in the next bullet.
- Lift the inner cover off the phone.




## Step 5

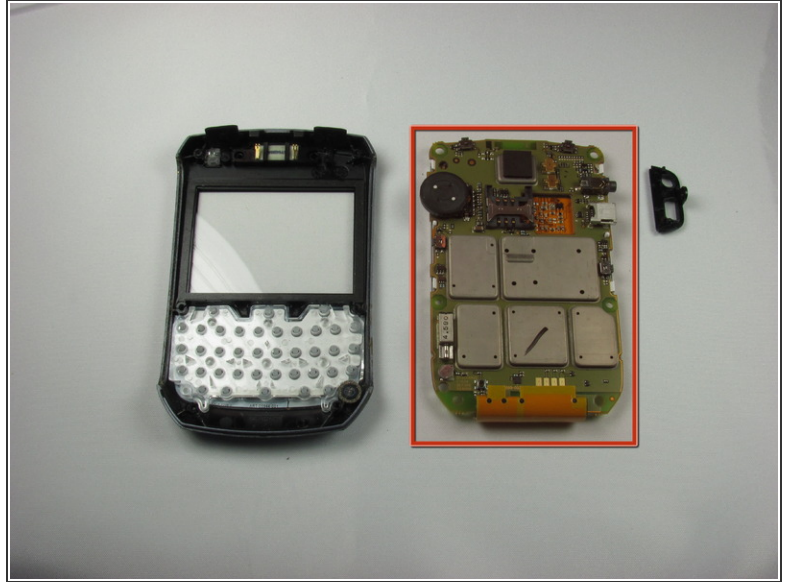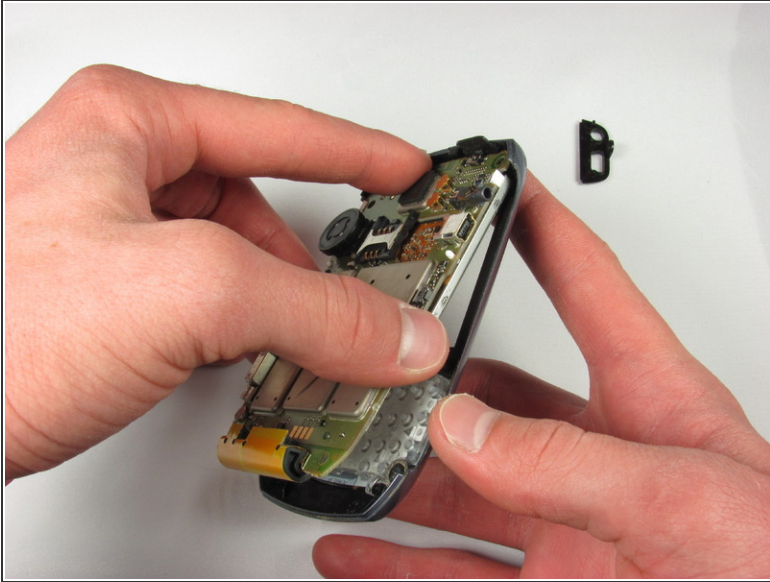

**i** The logic board removed in the next bullet is the entire circuit board circled in Picture 2.

- Remove the logic board by lifting it away the front cover.

## Step 6

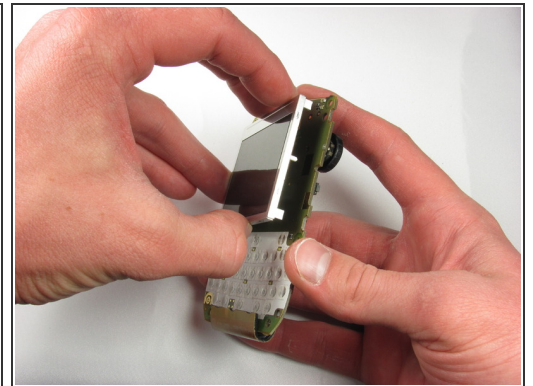
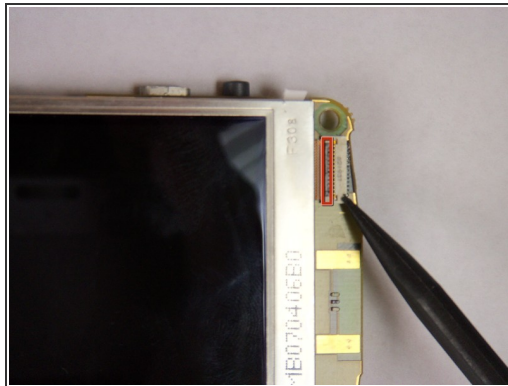
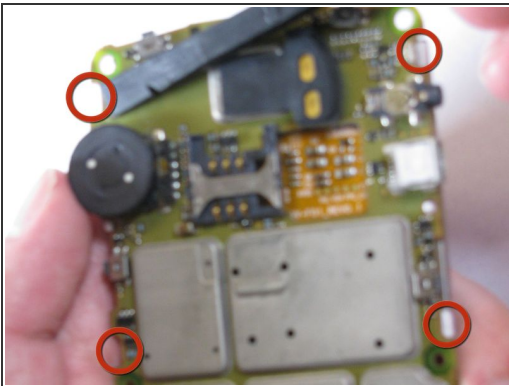


**i** The clips disengaged in the next bullet may weaken and break after unclipping them.

- Detach the display screen from the logic board by using a spudger to unclip the four clips holding the display screen (circled in Picture 1). Gently pull the display screen away from the logic board so that none of the clips are engaged.
- The display screen is attached to the logic board by a metal ribbon. Remove the display screen by disengaging the ribbon lock. Use a spudger to push the thin black bar down (circled in Picture 2). Gently pull the display screen and ribbon out of the logic board.




## Step 7

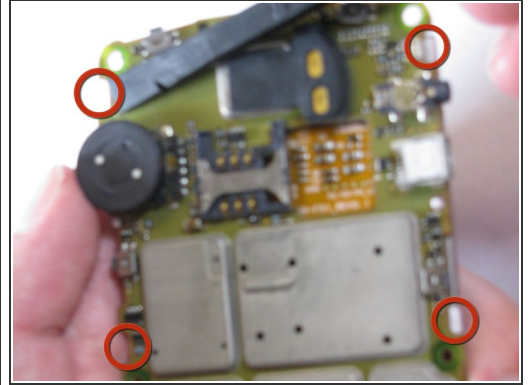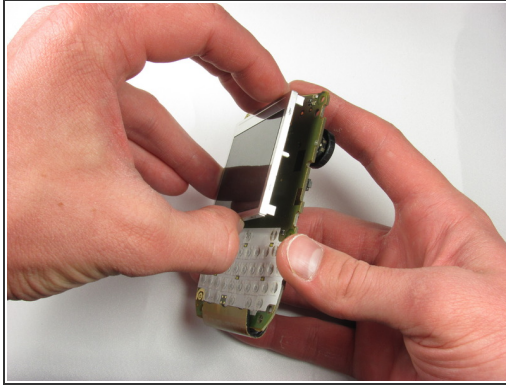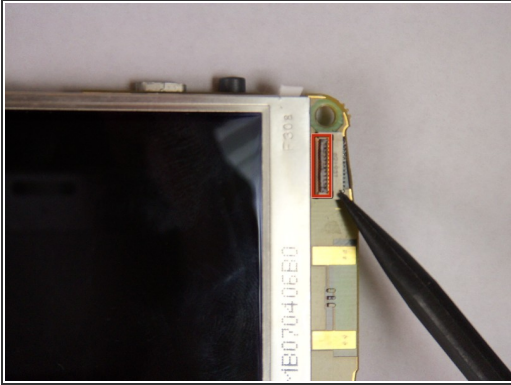


- Install the new display screen by reattaching it to the logic board. Reinsert the ribbon into the cable lock. Use the spudger to push the thin black bar up (circled in Picture 1).
- Gently place the display screen against the logic board so that it is aligned with the clips. Use a spudger to engage all four clips (circled in Picture 3).

## Step 8

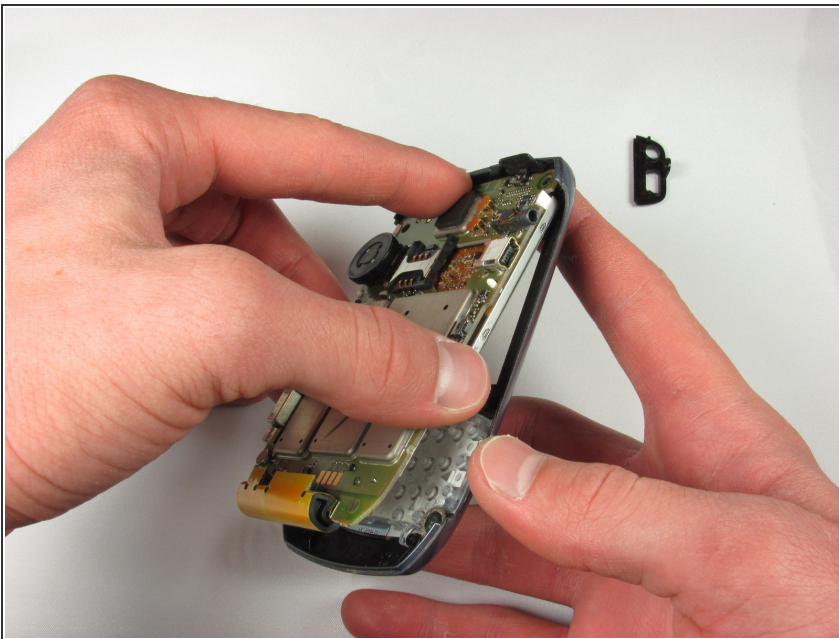

- Replace the logic board by sliding it into the front cover.

## Step 9

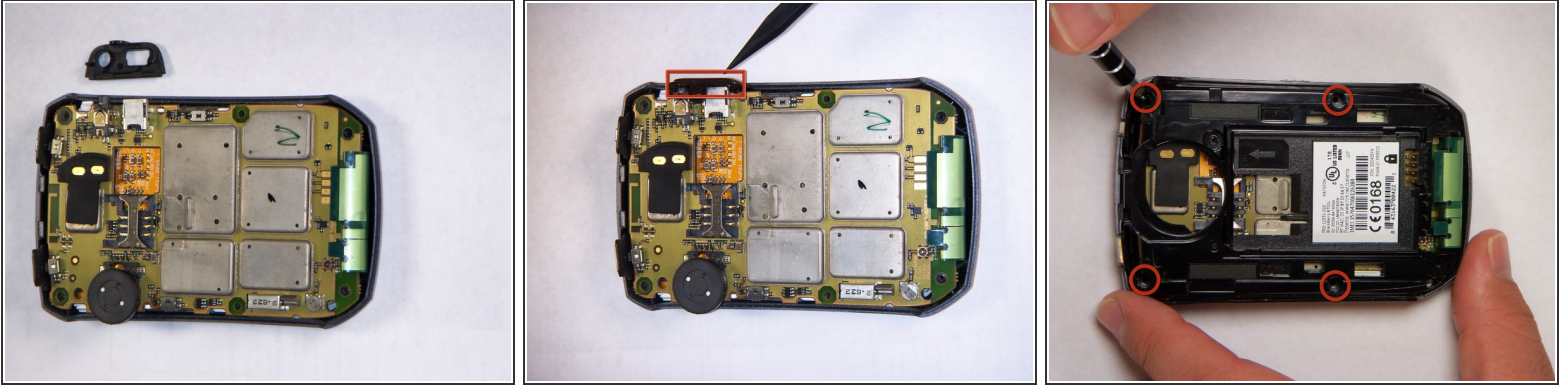

- i** The small black piece that is reattached in the next bullet will not snap into place until the inner cover is reattached. You will need to hold it in place until then.
- Position the small black piece that fell out in Step 2 against the headphone jack on the side of the phone (circled in Picture 2).
  - Replace the inner cover on the phone by screwing in all four T6 screws (circled in Picture 3) with a T6 Torx screwdriver.

## Step 10



- Replace the inner back cover by snapping the top of the cover against the phone. Push down on the bottom of the inner back cover to snap the entire cover into place.
- Screw in all four T6 screws (circled in Picture 3) with a T6 Torx screwdriver.



## Step 11



- Replace the battery by positioning the top of the battery in the phone and snapping in the bottom.

## Step 12



- Replace the battery cover by sliding it against the device and snapping it into place.